



Figure similar

SETRON, uchwyt bezpiecznika cylindrycznego, 10x38 mm, 3-bieg., In: 32 A, Un AC: 690 V

Wersja	
Nazwa markowa produktu	SETRON
oznaczenie produktu	Uchwyt bezpiecznika cylindrycznego
Ogólne dane techniczne	
liczba biegunów	3
wielkość wkładki bezpiecznikowej	10 x 38 mm
Napięcie zasilania	
napięcie robocze	690 V
• przy AC wartość znamionowa	
Stopień ochrony IP	IP20
Konstrukcja mechaniczna	
wysokość	81 mm
szerokość	54 mm
głębokość	64 mm
masa netto	185 g
Certyfikaty	
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	F
Zezwolenia Certyfikaty	
General Product Approval	Test Certificates



[Confirmation](#)



[Miscellaneous](#)

other	Environment
Miscellaneous	Confirmation Environmental Confirmations

Więcej informacji
Informacje dotyczące opakowania
Informacje dotyczące opakowania
Information- and Downloadcenter (Catalogs, Brochures,...)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7033
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NW7033>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7033


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

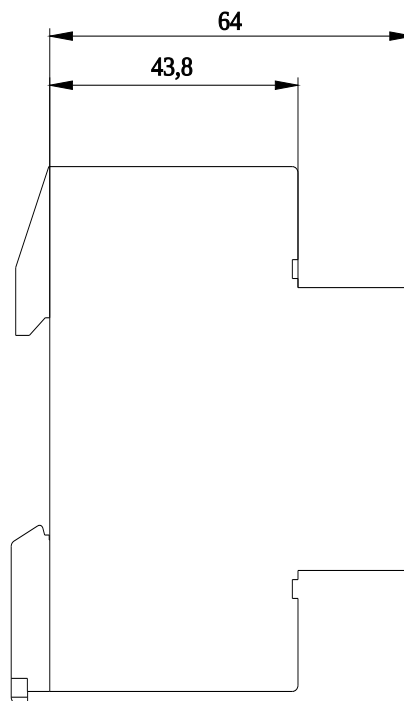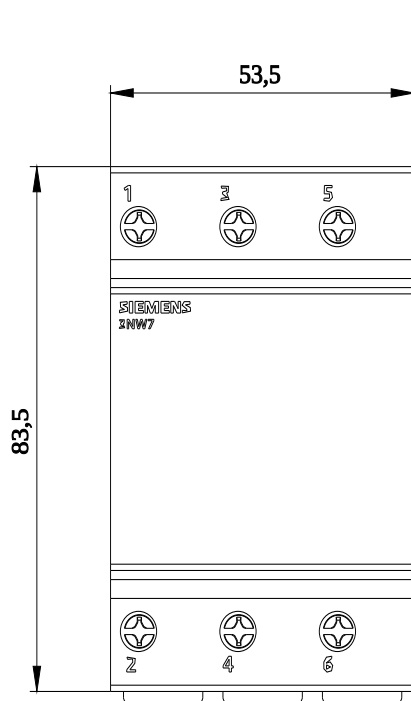

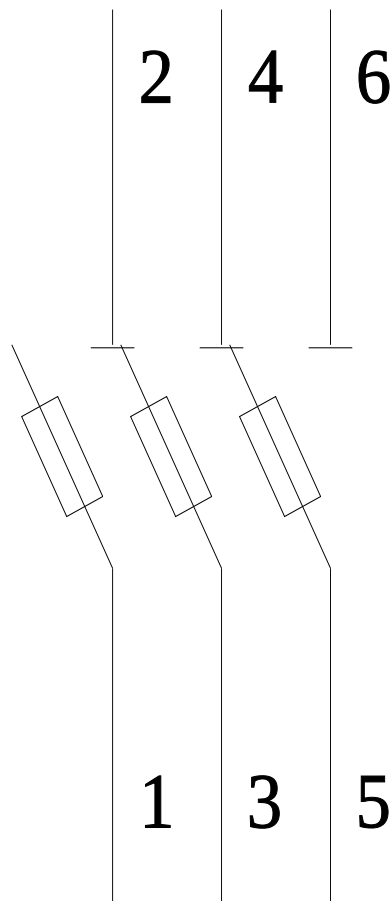

Ostatnia zmiana:

24.09.2021 

