



Solid-state contactor 1-phase 3RF2 AC 51 / 30 A / 40 °C 48-460 V / 24 V DC screw terminal

product brand name**SIRIUS****product designation****solid-state contactor****design of the product****single-phase****product type designation****3RF23****manufacturer's article number**

- [3RF2900-3PA88](#)
- [3RF2900-0EA18](#)
- [3RF2950-0GA16](#)
- [3RF2920-0FA08](#)

product designation

- terminal cover
- converter
- load monitoring
- load monitoring, basis

- _1 of the accessories that can be ordered
- _3 of the accessories that can be ordered
- _4 of the accessories that can be ordered
- _5 of the accessories that can be ordered

- _1 of the accessories that can be ordered
- _3 of the accessories that can be ordered
- _4 of the accessories that can be ordered
- _5 of the accessories that can be ordered

General technical data**product function****zero-point switching****power loss [W] for rated value of the current**

33 W

- at AC in hot operating state
- at AC in hot operating state per pole
- without load current share typical

33 W

0.4 W

insulation voltage rated value

600 V

degree of pollution

3

type of voltage of the control supply voltage

DC

surge voltage resistance of main circuit rated value

6 kV

shock resistance according to IEC 60068-2-27

15g / 11 ms

vibration resistance according to IEC 60068-2-6

2g

reference code according to IEC 81346-2

Q

Substance Prohibition (Date)

07/01/2006

Main circuit**number of poles for main current circuit**

1

number of NO contacts for main contacts

1

number of NC contacts for main contacts

0

operating voltage at AC

48 ... 460 V

- at 50 Hz rated value
- at 60 Hz rated value

48 ... 460 V

operating frequency rated value

50 ... 60 Hz

operating range relative to the operating voltage at AC

40 ... 506 V

- at 50 Hz
- at 60 Hz

40 ... 506 V

operational current

30 A

- at AC-51 rated value

• at AC-51 according to IEC 60947-4-3	22 A
• according to UL 508 rated value	27 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I_{2t} value maximum	1 800 A ² ·s

Control circuit/ Control

type of voltage of the control supply voltage	DC
control supply voltage 1	
• at DC rated value	30 V
• at DC	15 ... 24 V
control supply voltage	
• at DC initial value for signal <1> detection	15 V
• at DC full-scale value for signal <0> recognition	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave

Auxiliary circuit

number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0

Installation/ mounting/ dimensions

fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
• side-by-side mounting	Yes
design of the thread of the screw for securing the equipment	M4
height	95 mm
width	45 mm
depth	135.5 mm

Connections/ Terminals

type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.5 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²)
— finely stranded with core end processing	2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ²
• at AWG cables for main contacts	2x (14 ... 10)
connectable conductor cross-section for main contacts	
• solid or stranded	1.5 ... 6 mm ²
• finely stranded with core end processing	1 ... 10 mm ²
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
AWG number as coded connectable conductor cross section for main contacts	10 ... 10
tightening torque	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	18 ... 22 lbf·in

• for auxiliary and control contacts with screw-type terminals	4.5 ... 5.3 lbf·in	
design of the thread of the connection screw		
• for main contacts	M4	
• of the auxiliary and control contacts	M3	
stripped length of the cable		
• for main contacts	7 mm	
• for auxiliary and control contacts	7 mm	
Safety related data		
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Ambient conditions		
installation altitude at height above sea level maximum	1 000 m	
ambient temperature		
• during operation	-25 ... +60 °C	
• during storage	-55 ... +80 °C	
Electromagnetic compatibility		
conducted interference		
• due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2	
• due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2	
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV behavior criterion 2	
• due to high-frequency radiation according to IEC 61000-4-6	140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1	
field-based interference according to IEC 61000-4-3	80 MHz ... 1 GHz 10 V/m, behavior criterion 1	
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2	
conducted HF interference emissions according to CISPR11	Class A for industrial environment	
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments	
Short-circuit protection, design of the fuse link		
manufacturer's article number		
• of gS fuse for semiconductor protection at NH design usable	3NE1803-0	
• of full range R fuse link for semiconductor protection at cylindrical design usable	5SE1335	
• of back-up R fuse link for semiconductor protection at NH design usable	3NE8003-1	
• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	3NC1032	
• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	3NC1450	
• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	3NC2263	
manufacturer's article number of the gG fuse		
• at NH design usable	3NA6807 ; These fuses have a smaller rated current than the semiconductor relays	
• at cylindrical design 14 x 51 mm usable	3NW6105-1 ; These fuses have a smaller rated current than the semiconductor relays	
• at cylindrical design 22 x 58 mm usable	3NW6205-1 ; These fuses have a smaller rated current than the semiconductor relays	
manufacturer's article number		
• of DIAZED fuse usable	5SB2711 ; These fuses have a smaller rated current than the semiconductor relays	
• of NEOZED fuse usable	5SE2320 ; These fuses have a smaller rated current than the semiconductor relays	
Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



[Confirmation](#)



Declaration of Conformity	Test Certificates	other	Railway
---------------------------	-------------------	-------	---------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)



[Vibration and Shock](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2330-1AA04>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2330-1AA04>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2330-1AA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2330-1AA04&lang=en

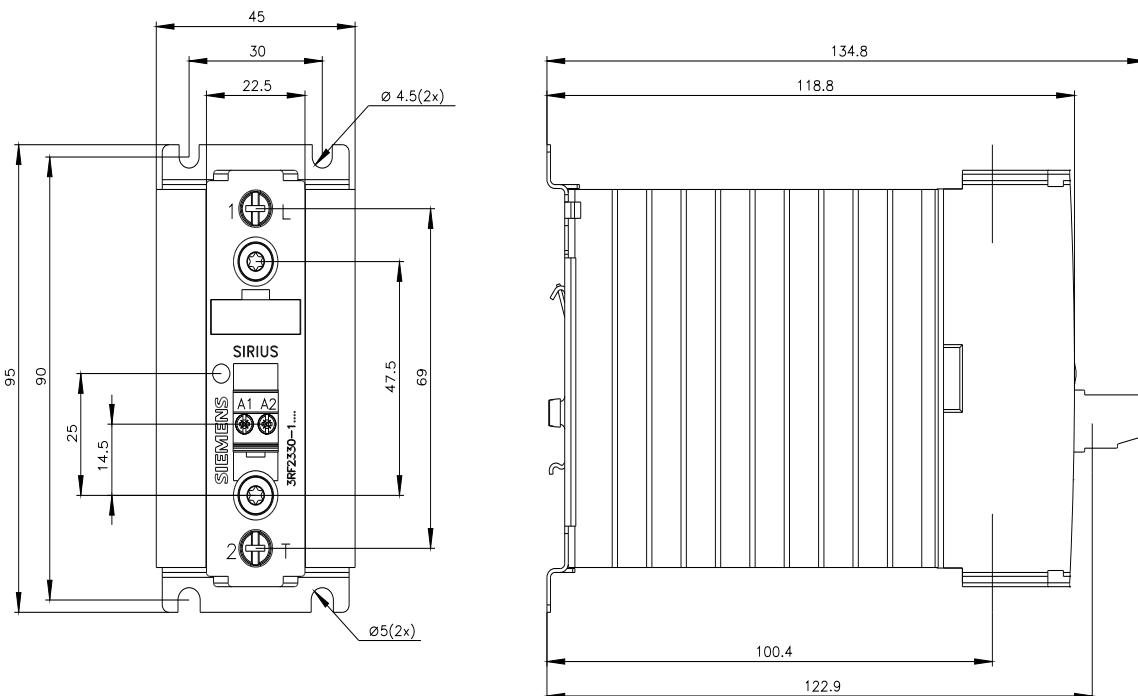

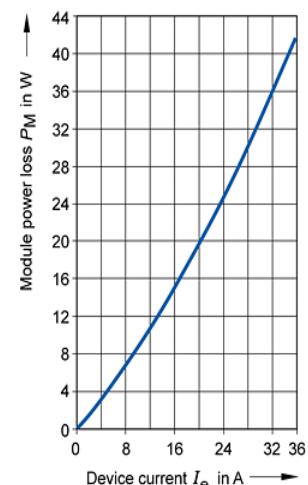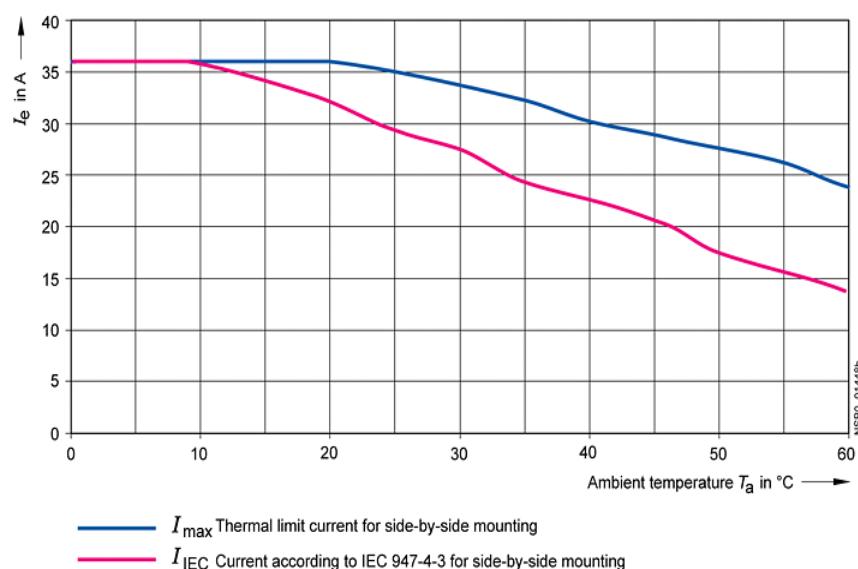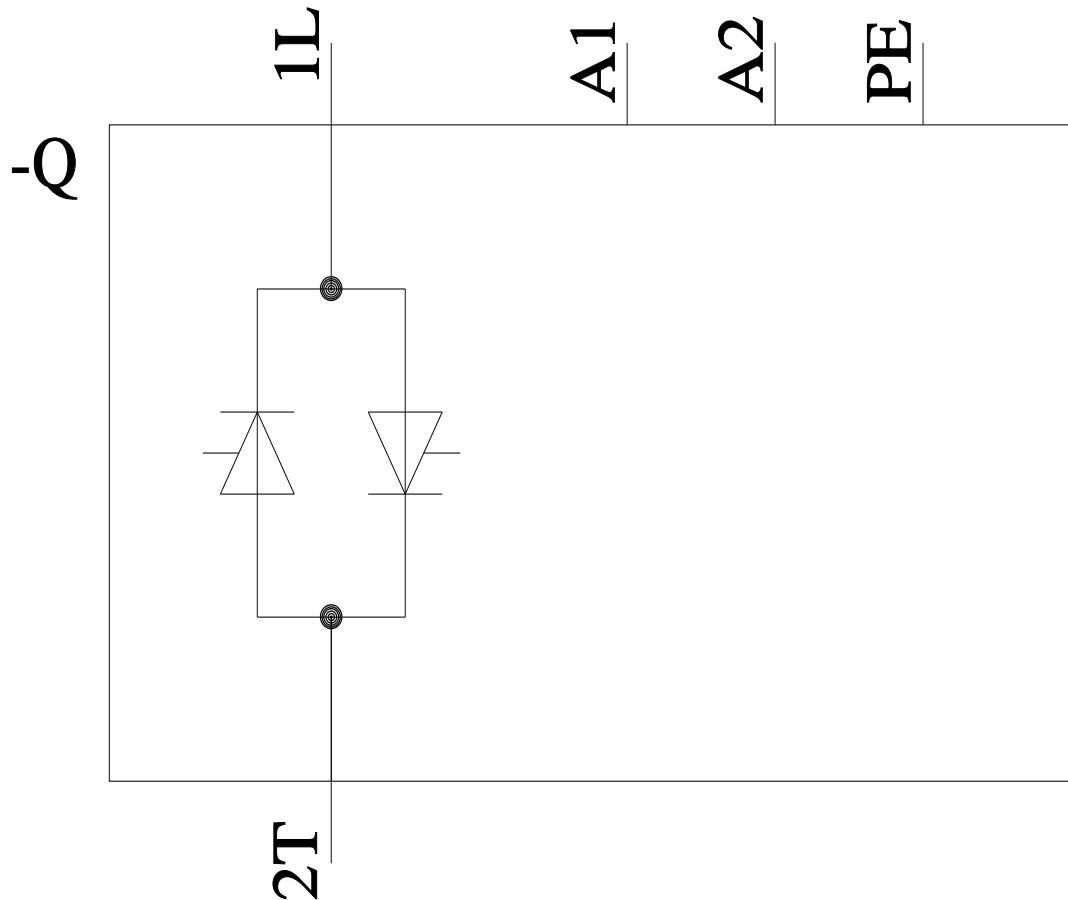

last modified:

1/26/2022