



Distribution block 1-pole, 250 A, 690V Input: 1x 35-120 mm² Output: 2x2.5-25+5x 2.5-16+4x 2.5-10 mm² for installation on standard mounting rail

Model	
product brand name	SETRON
Main circuit	
operational current rated value	250 A
connectable conductor cross-section stranded minimum	2.5 mm ²
Mechanical Design	
height	44 mm
width	45 mm
length	96 mm
ambient temperature during operation	
• minimum	-25 °C
• maximum	70 °C
Approvals Certificates	
General Product Approval	other



[Confirmation](#)



EG-Konf.



[Miscellaneous](#)



[Confirmation](#)

other	Environment
Miscellaneous	Environmental Con- firmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST2508
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/5ST2508
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST2508
CAX-Online-Generator http://www.siemens.com/cax
Tender specifications http://www.siemens.com/specifications

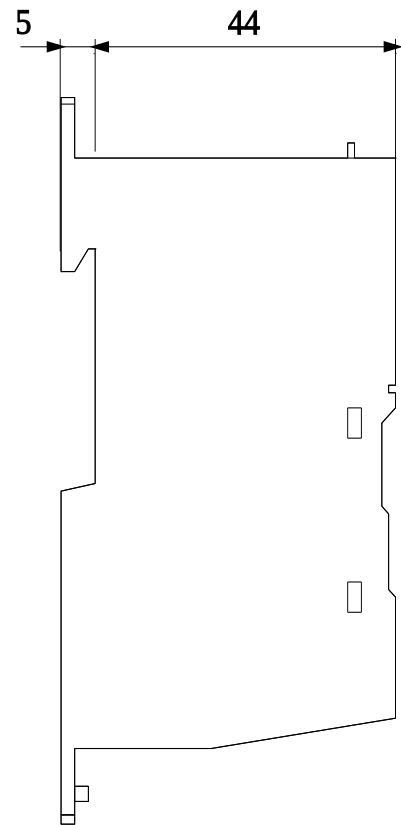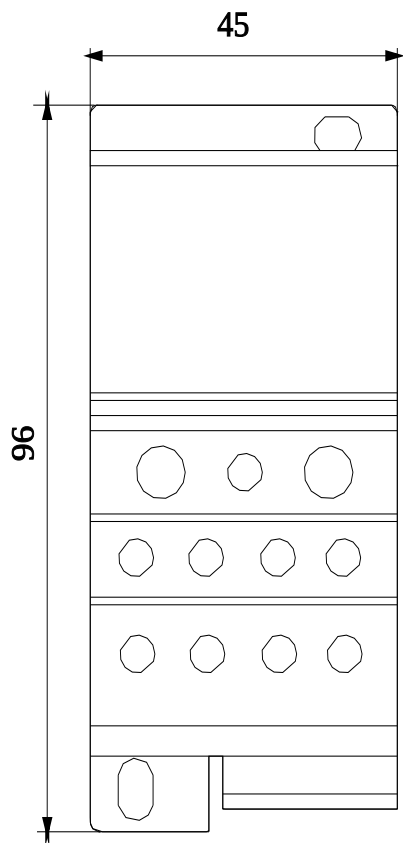

last modified:

2/13/2024 

