



Dławice MGEO - z odgiętką

materiał: poliamid 6.6 + PVC

kolor: szary RAL7035


stopień szczelności: IP68

temp. montażu: -10°C do +60°C

temp. pracy: -40°C do +80°C

palność: UL-94 V2

tolerancja: ±5%

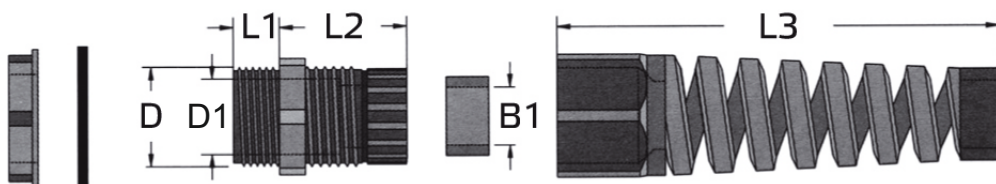

TYP	ŚREDNICA OTWORU [mm]	SKOK GWINTU [mm]	WYMIARY [mm]						ZAKRES DŁAWIENIA PRZEWODÓW [mm]	OPAKOWANIE [szt]	
			B1	D	D1	L1	L2	L3			
MGEO-12	12,0 - 12,3	1,25	6,9	12,0	8,3	7,9	19,6	53,3	3-6,5	10	☐
MGEO-16	16,0 - 16,3	1,50	10,5	16,0	10,9	15,5	23,4	74,4	5-10	10	☐
MGEO-20	20,0 - 20,3	1,50	14,0	20,0	15,0	15,0	28,5	96,2	10-14	10	☐
MGEO-25	25,0 - 25,3	1,50	18,4	25,0	18,6	15,2	29,4	111,2	13-18	10	☐

CE RoHS Compliant IP68



złącz

TRYTYT.COM!