

Data sheet

3ZY1212-2EA00



Device connector for 3RM1 motor starter Width 22.5 mm for electrical connection of SIRIUS devices in industrial standard mounting rail enclosure

product brand name
product category
product designation
design of the product
Substance Prohibitance (Date)
fastening method
height
width

SIRIUS
Device connector
Device connector, type 2
For 3RM1, 24 V DC, 22.5 mm
03/01/2017
Screw and DIN rail mounting
117.5 mm
22.5 mm

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1212-2EA00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1212-2EA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1212-2EA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1212-2EA00&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1212-2EA00/manual>

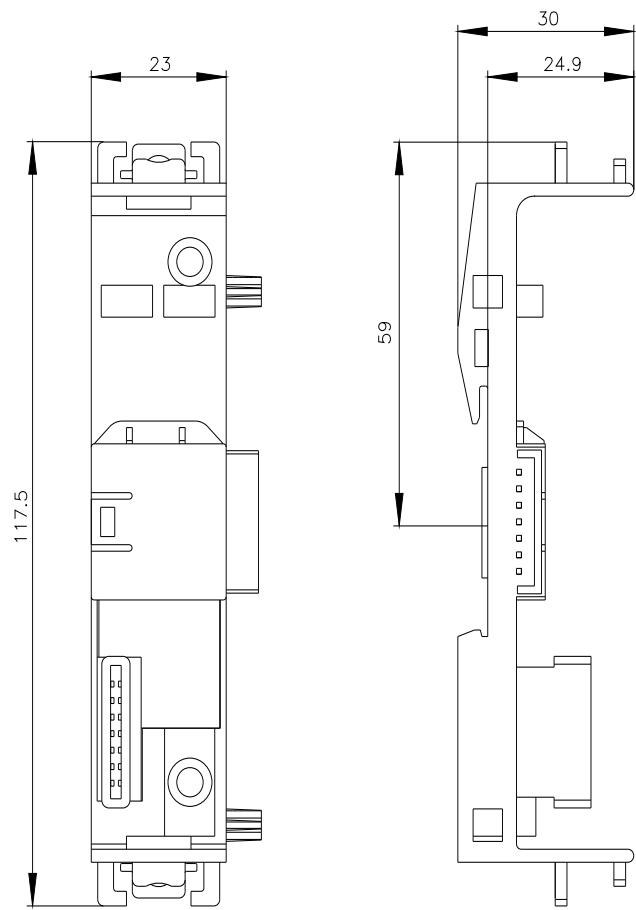

last modified:

12/5/2022 