




Molded-plastic enclosure for surface mounting Degree of protection IP55 with N and PE terminal Can be locked in O position 54 mm with metric cable gland No UL/CSA approval

General technical data		
product designation		ISO surface-mounted housing
design of the product		Assembly
material of the enclosure		plastic
protection class IP of the enclosure		IP55
product component transparent cover		No
Installation/ mounting/ dimensions		
width	mm	85
height	mm	155
depth	mm	126
Certificates/ approvals		
General Product Approval	Declaration of Conformity	Test Certificates
Confirmation	  	Special Test Certificate Type Test Certificates/Test Report
Marine / Shipping	other	Railway
 	Miscellaneous	
	Confirmation	Special Test Certificate

Further information	
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business	
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).	
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1923-1CA00	
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1923-1CA00	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	

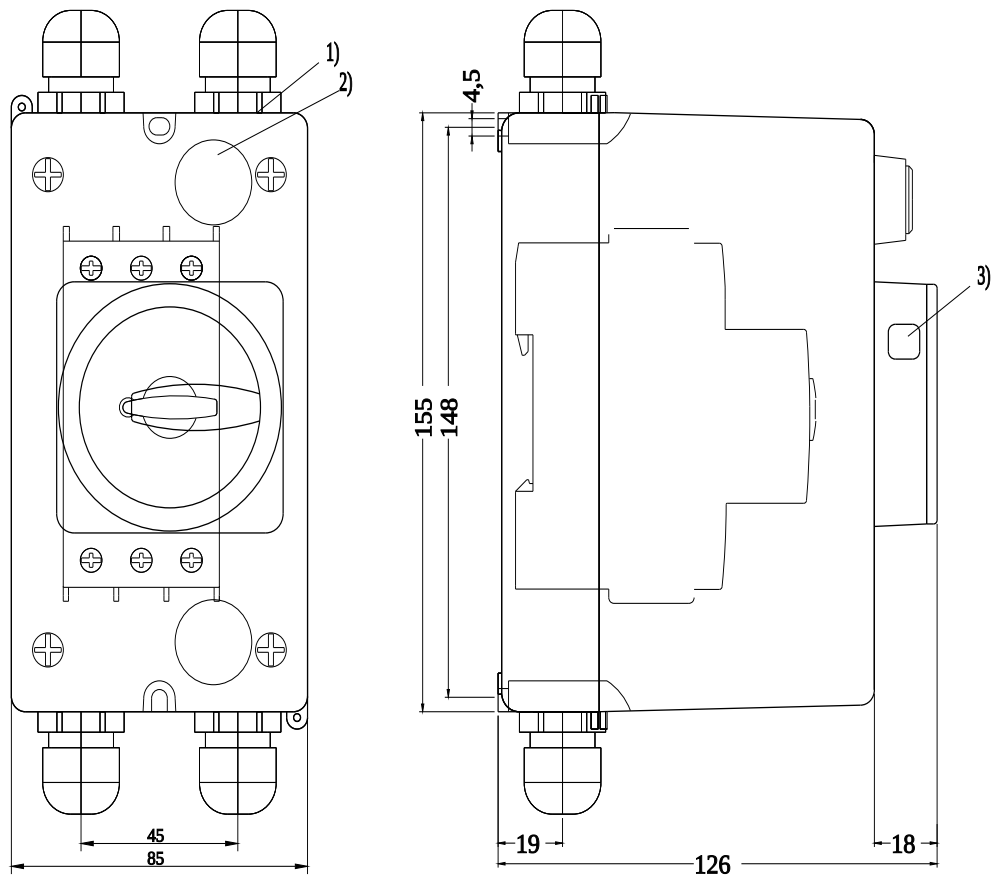

- 1) Ausbrechoeffnung fuer Verschraubung M25
- 2) Ausbrechoeffnung fuer ruckseitige Leitungseinfuehrung
- 3) Oeffnung fuer Vorhaengeschloss mit Buegeldurchmesser max. 8 mm

last modified:

12/23/2020