



LED module with integrated LED 24 V AC/DC, amber, screw terminal, for front plate mounting, Minimum order quantity 5 or a multiple thereof

product brand name
product designation
product type designation

SIRIUS ACT
LED module
3SU1

General technical data

product component

- diode
- lamp transformer
- light source
- series resistor

Yes
No
Yes
No

insulation voltage rated value

320 V

degree of pollution

3

type of voltage of the operating voltage

AC/DC

- for actuation

AC/DC

surge voltage resistance rated value

4 kV

consumed current maximum

25 mA

protection class IP

- of the enclosure
- of the terminal

IP40
IP20

shock resistance

- according to IEC 60068-2-27
- for railway applications according to EN 61373

sinusoidal half-wave 15g / 11 ms
Category 1, Class B

vibration resistance

- according to IEC 60068-2-6
- for railway applications according to EN 61373

10 ... 500 Hz: 5g
Category 1, Class B

operating period typical

100 000 h

reference code according to IEC 81346-2

P

Substance Prohibition (Date)

10/01/2014

operating voltage 1

- at AC
 - at 50 Hz rated value
 - at 60 Hz rated value
- at DC rated value

24 V
24 V
24 V

relative positive tolerance of the operating voltage

20 %

relative negative tolerance of the operating voltage

20 %

Control circuit/ Control

inrush current maximum

2 A

Connections/ Terminals

type of electrical connection

screw-type terminals

type of connectable conductor cross-sections

2x (0.5 ... 0.75 mm²)

- solid with core end processing
- solid without core end processing

2x (1.0 ... 1.5 mm²)

• finely stranded with core end processing	2x (0.5 ... 1.5 mm ²)
• finely stranded without core end processing	2x (1,0 ... 1,5 mm ²)
• at AWG cables	2x (18 ... 14)
tightening torque with screw-type terminals	0.8 ... 0.9 N·m

Lamp

type of light source	LED
color of the light source	amber
light intensity	450 ... 1 120 mcd
certificate of suitability	
• ATEX	No
• IECEx	No

Ambient conditions

ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)

Installation/ mounting/ dimensions

fastening method	
• of modules and accessories	Front plate mounting
height	33.2 mm
width	9.8 mm
depth	29.4 mm
suitability for integration	
• plastic enclosure	Yes
• metal enclosure	Yes

Certificates/ approvals

General Product Approval	Declaration of Conformity	Test Certificates
Confirmation	   	Special Test Certificate

Test Certificates	Marine / Shipping	other
Type Test Certificates/Test Report	   	Confirmation

Environment

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BB00-1AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAOrder/default.aspx?lang=en&mlfb=3SU1401-1BB00-1AA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BB00-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1BB00-1AA0&lang=en

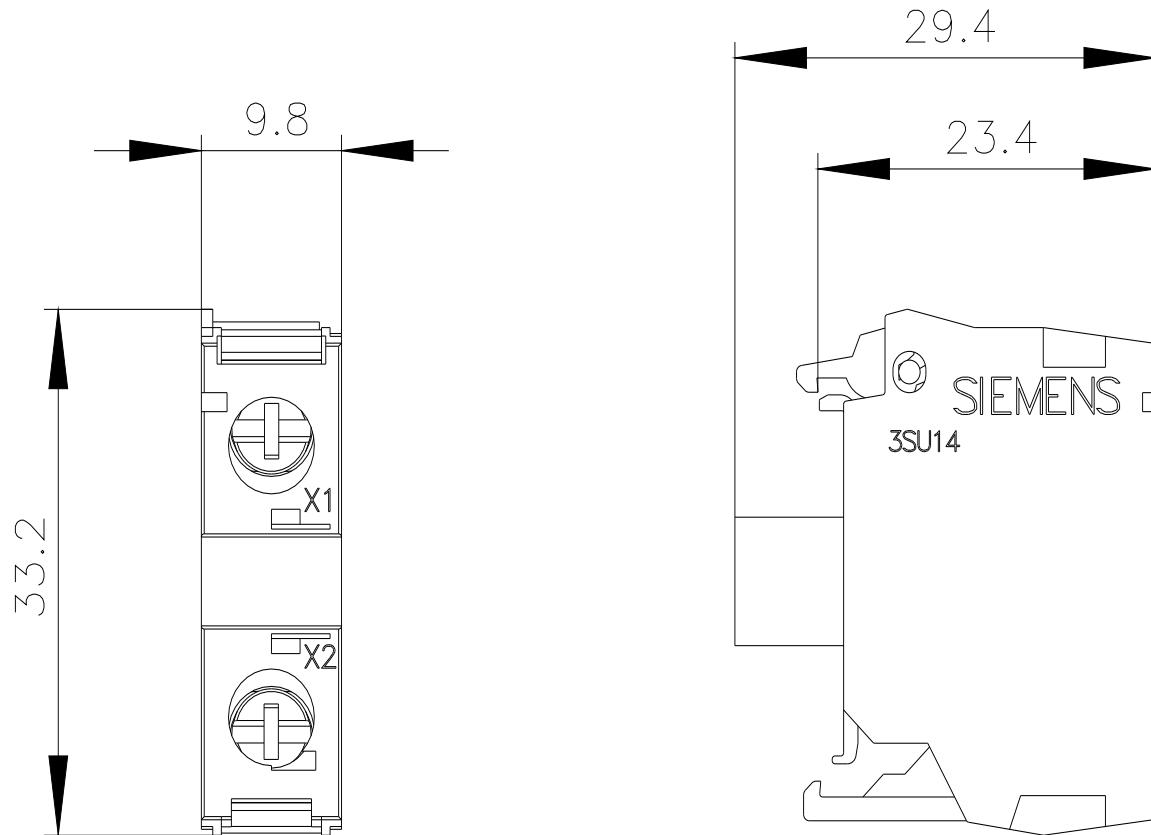

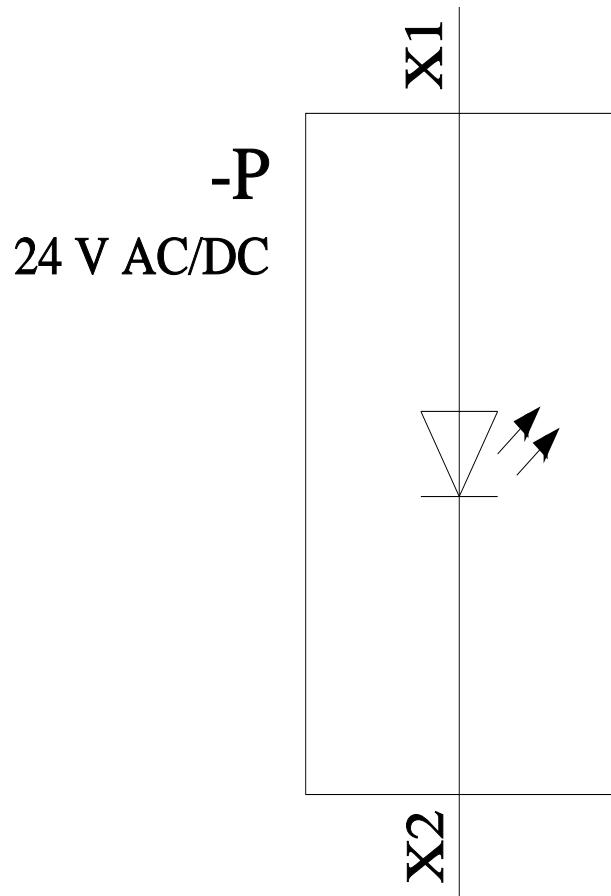

last modified:

3/9/2022