



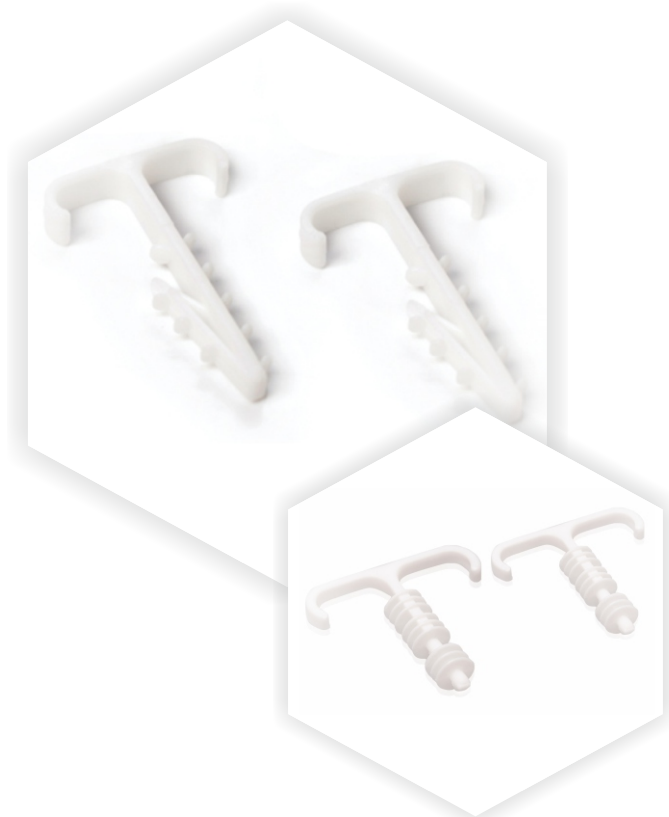


Uchwyty UWT

material: polipropylen
temp. montażu: $> -5^{\circ}\text{C}$
temp. pracy: $-20^{\circ}\text{C} + 60^{\circ}\text{C}$
tolerancja: $\pm 5\%$

UWT



UWT-2,5K



TYP	DLA PRZEWODÓW PŁASKICH TYPU	WYMIARY [mm]				ROZMIAR WIERTŁA [mm]	OPAKOWANIE [szt]	
		A	a	L	I			
UWT-1	YDYp: 3x1,5	28	11	43	35	6 - 7	100	☐
UWT-2	YDYp: 3x2,5	31	13	43	35	6 - 7	100	☐
UWT-2,5K	YDYp: 3x2,5	31	13	30	23	6	100	☐