



NEOZED fuse-link, D02, 32 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

Model		
product brand name	SENTRON	
product designation	NEOZED fuse link	
design of the product	With tin-coated contact caps	
product variations	Pack of 10	
design of the fuse link	NEOZED fuse link	
General technical data		
size of fuse system according to EN 60269-1	D02	
operating class of the fuse link	gG	
Supply voltage		
supply voltage		
• at AC rated value	400 V	
• at DC	250 V	
operating voltage rated value	400 V	
protection class IP	IP20, with connected conductors	
switching capacity current according to IEC 60947-2 rated value	50 kA	
Dissipation		
power loss [W] for rated value of the current at AC in hot operating state per pole	1.7 W	
Main circuit		
operational current rated value	32 A	
Appearance		
color coding of the fuse link	Violet	
maximum short-circuit current breaking capacity (Icu) at AC rated value	50 kA	
Mechanical Design		
mounting position	Any, preferably vertical	
net weight	17 g	
ambient temperature during operation		
• minimum	-25 °C	
• maximum	40 °C	
environmental category	Up to 45°C at 95 % rel. humidity	
General Product Approval		Declaration of Conformity
		Test Certificates

[Confirmation](#)



[Special Test Certificate](#)

Test Certificates		other	Environment	
Type Test Certificates/Test Report	Miscellaneous	Miscellaneous	Confirmation	Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2332>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE2332>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2332

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

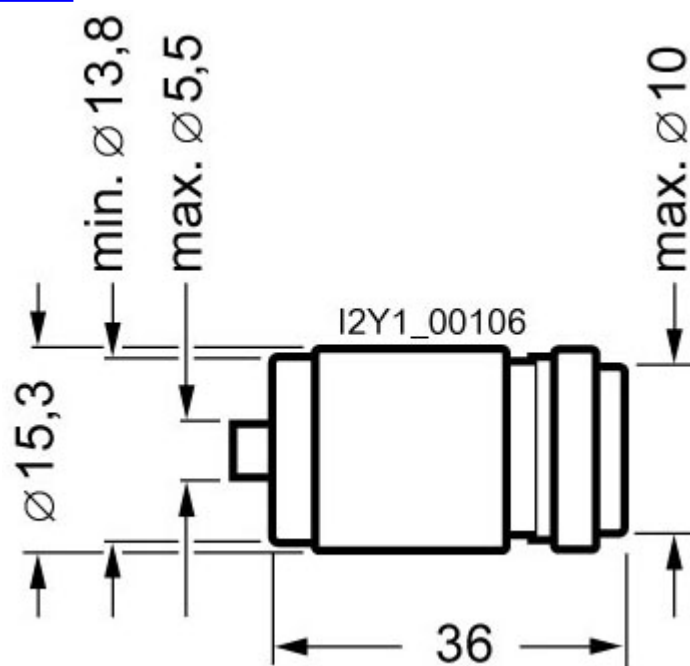

last modified:

1/27/2023

