




SOLIMPEKS

SOLAR TANKS

SOLIBUFFER

- Minimum heat loss - polyurethane insulation
- Compatible with heat pump systems
- Lightweight, aesthetic, long life and maintenance-free
- Optional immersion heater
- Easy installation due to compact design
- 5 year warranty

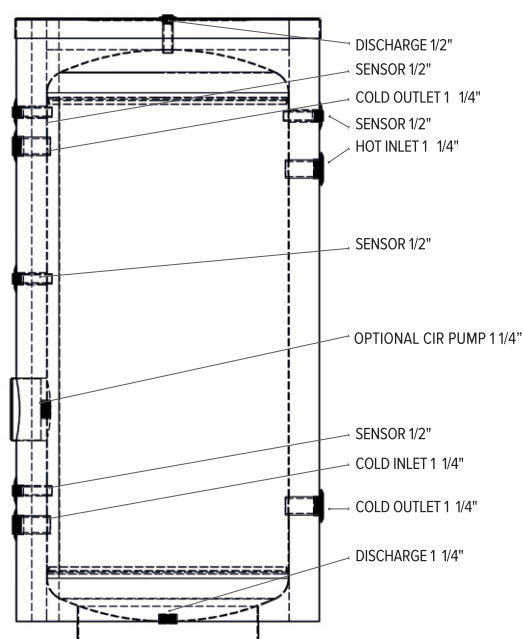

TECHNICAL SPECIFICATIONS

	BUFFER 100	BUFFER 200	BUFFER 300	BUFFER 500	BUFFER 1000
Product Code	MA-0004	MA-0003	MA-0360	MA- 0490	MA- 0491
Height (mm)	795	1245	1770	1653	2033
Diameter (mm)	542	542	542	750/807	1017
Net Weight (kg)	50	60	70	90	180
Volume (lt)	132	170	245	454	970
Insulation	50 mm /40 kg/m ³	50 mm /40 kg/m ³	50 mm /40 kg/m ³	50 mm /40 kg/m ³ - 80 mm /18 kg/m ³	80 mm /18 kg/m ³
Insulating Material	Polyurethane (CFC Free)	Polyurethane (CFC Free)	Polyurethane (CFC Free)	Polyurethane / 18 Density Foam Rubber (CFC Free)	18 Density Foam Rubber
Outer Cylinder Materials	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel /Leatherette Jacket	Leatherette Jacket