



SETRON, measuring device, 7KM PAC2200, LCD, L-L: 400 V, L-N: 230 V, 65 A, strd rail instr., 3-phase, Modbus RTU, apparent /active/reactive energy, self-powered, screw terminals

Model			
product brand name		SETRON	
product quality calibrated		No	
type of measured value detection load profile		No	
type of signal		S0	
design of the energy counter		Solid-state	
design of the pulse output		Electrical	
General technical data			
type of the power supply network		three-wire/four-wire	
Supply voltage			
operating voltage			
• between L and L minimum		3 V	
• between L and L maximum		480 V	
• between N and L minimum		3 V	
• between N and L maximum		276 V	
Protection class			
protection class IP		IP40	
Main circuit			
operating frequency rated value			
• minimum		45 Hz	
• maximum		65 Hz	
operational current rated value		65 A	
Suitability			
suitability for use		Import/export	
Product function			
product function			
• backstop		Yes	
• blocking code		Yes	
Display and operation			
display version		digital	
Number			
number of characters that can be displayed		12	
Mechanical Design			
number of modular width units		6	
fastening method		DIN rail device	
net weight		526 g	
General Product Approval		Declaration of Conformity	other

Environment[Environmental Confirmations](#)**Further information**

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM2200-2EA40-1DA1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM2200-2EA40-1DA1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM2200-2EA40-1DA1


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

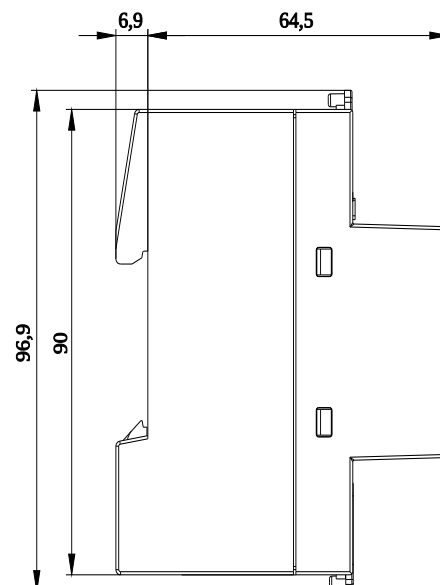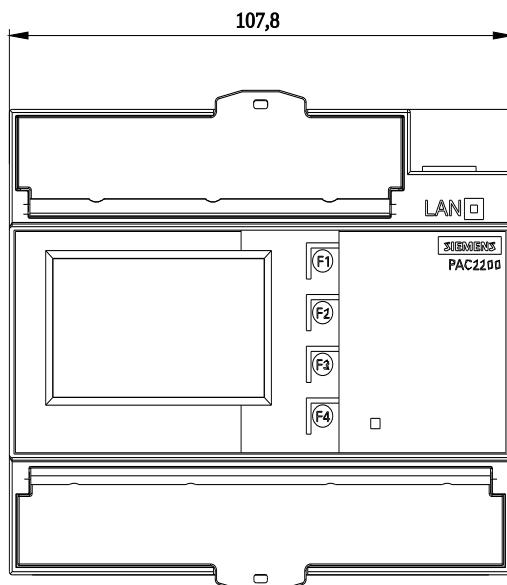

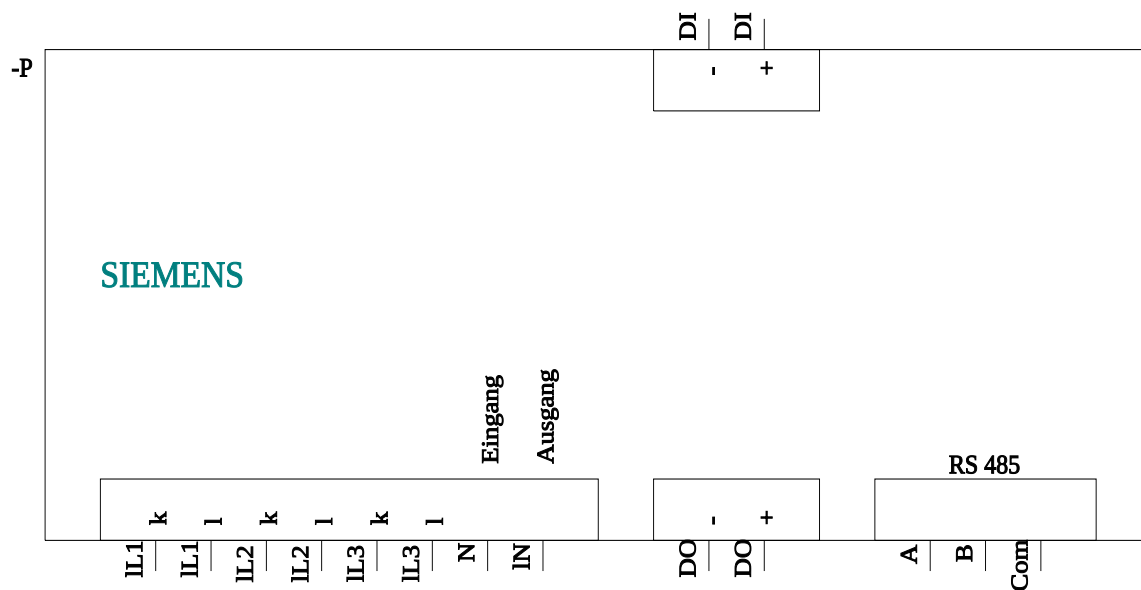

last modified:

8/1/2022

