



Load disconnector 3LD3, Iu 32 A Main switch 3-pole Rated operating capacity for AC-23 A at 400V 11.5kW Installation in distribution boards, Basic switch with selector knob black

Model	
product brand name	SENTRON
product designation	Switch disconnector
design of the product	Main switch
display version for switch position indicator manual operation	1 ON - 0 OFF
type of switch	DIN-rail mounting
design of the actuating element	selector switch
color of the actuating element	black
design of handle	knob-operated mechanism, black
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
number of poles note	3
mechanical service life (operating cycles) typical	100 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
operating frequency maximum	50 1/h
degree of pollution	3
Voltage	
insulation voltage rated value	690 V
surge voltage resistance rated value	6 kV
operating voltage	
• at AC rated value	690 V
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
Protection class	
protection class IP	IP40
protection class IP on the front	IP40
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.8 W
Main circuit	
operational current	
• at AC-21 at 690 V rated value	32 A
• at AC-21 A at 240 V rated value	32 A
• at AC-21 A at 400 V rated value	32 A
• at AC-21 A at 440 V rated value	32 A
• at AC-23 A at 400 V rated value	22 A
operating power	

• at AC-23 A at 240 V rated value	6 kW
• at AC-23 A at 400 V rated value	12 kW
• at AC-23 A at 440 V rated value	11.5 kW
• at AC-23 A at 690 V rated value	12 kW
• at AC-3 at 240 V rated value	5.5 kW
• at AC-3 at 400 V rated value	10 kW
• at AC-3 at 690 V rated value	9.5 kW

Auxiliary circuit

number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
operating voltage of auxiliary contacts at AC maximum	500 V
continuous current of the auxiliary contact rated value	10 A

Suitability

suitability for use	
• main switch	Yes
• switch disconnector	Yes
• EMERGENCY OFF switch	No
• safety switch	Yes
• maintenance/repair switch	Yes

Product details

special product feature	Can be locked in zero position
product feature can be locked into OFF position	Yes

accessories

product extension optional	
• motor drive	No
• voltage trigger	No
number of connectable NC contacts for auxiliary contacts attachable maximum	2
number of connectable NO contacts for auxiliary contacts attachable maximum	4
number of connectable CO contacts for auxiliary contacts attachable maximum	0
number of bracket locks maximum	2
hasp thickness of the bracket locks	4 ... 6 mm

Short circuit

conditional short-circuit current with line-side fuse protection	
• at 440 V by gG fuse rated value	10 kA
• at 690 V by gG fuse rated value	6 kA
let-through current with closed switch	
• at 240 V for combination switch + gG fuse maximum	4.5 kA
• at 440 V for combination switch + gG fuse maximum	4.5 kA
• at 690 V for combination switch + gG fuse maximum permissible	5 kA
I _{2t} value with closed switch	
• at 240 V for combination switch + gG fuse maximum	9 kA2.s
• at 440 V for combination switch + gG fuse maximum	9 kA2.s
• at 690 V for combination switch + gG fuse maximum	9 kA2.s

design of the fuse link	
• for short-circuit protection of the main circuit required	fuse gL/gG: 40 A
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

operational current of upstream fuse rated value	32 A
--	------

according UL

operational current at AC according to UL 508/UL 60947-4-1 rated value	32 A
operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value	600 V
active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value	20
active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	20
short-time withstand current (SCCR) at 600 V according to UL 508/UL 60947-4-1	5 kA

continuous current of upstream fuse according to UL rated value	50 A						
type of fuse according to UL	RK5						
Connections							
AWG number as coded connectable conductor cross section solid maximum							
•	6						
•	14						
type of connectable conductor cross-sections for copper conductor							
• solid	1x (2.5 to 16 mm ²)						
• finely stranded with core end processing	1x (2.5...16 mm ²)						
• stranded	1x (2.5 to 16 mm ²)						
type of connectable conductor cross-sections for auxiliary contacts							
• solid	2x (0.75 ... 2.5 mm ²), 1x 4 mm ²						
• finely stranded with core end processing	2x (0.75 ... 1.5 mm ²), 1x 2.5 mm ²						
• stranded	2x (0.75 ... 2.5 mm ²), 1x 4 mm ²						
type of electrical connection							
• for main current circuit	box terminal						
• for auxiliary contacts	Box terminals						
Mechanical Design							
height	60 mm						
width	36 mm						
depth	77 mm						
type of device	fixed mounting						
fastening method	Built-in unit fixed-mounted version						
fastening method							
• 4-hole front mounting	No						
• front mounting with central attachment	No						
• rail mounting	Yes						
net weight	200 g						
Environmental conditions							
ambient temperature during operation							
• minimum	-25 °C						
• maximum	55 °C						
ambient temperature during storage							
• minimum	-25 °C						
• maximum	55 °C						
Approvals Certificates							
General Product Approval							
		Confirmation					
other	Environment						
Confirmation	Miscellaneous	Environmental Confirmations	Environmental Confirmations				
Further information							
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875							
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs							
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD3230-0TK11							
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3LD3230-0TK11							
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)							



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD3230-0TK11

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

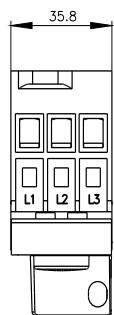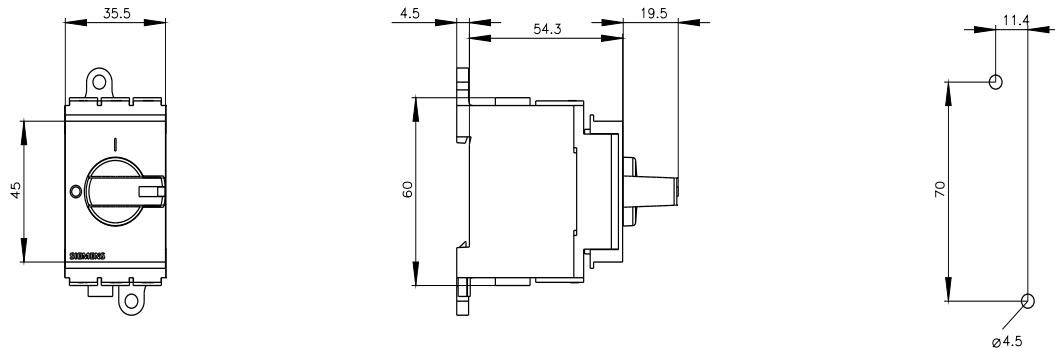

last modified:

6/20/2023

