



Figure similar

NEOZED fuse-link, D01, 16 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

Model	
product brand name	SETRON
product designation	NEOZED fuse link
design of the product	With tin-coated contact caps
product variations	Pack of 10
design of the fuse link	NEOZED fuse link
General technical data	
size of fuse system according to EN 60269-1	D01
operating class of the fuse link	gG
Supply voltage	
supply voltage	
• at AC	400 V
• at DC	250 V
operating voltage rated value	400 V
protection class IP	IP20, with connected conductors
switching capacity current according to IEC 60947-2 rated value	50 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.6 W
Main circuit	
operational current rated value	16 A
Appearance	
color coding of the fuse link	Gray
maximum short-circuit current breaking capacity (Icu) at AC rated value	50 kA
Mechanical Design	
mounting position	Any, preferably vertical
net weight	7 g
ambient temperature during operation	
• minimum	-25 °C
• maximum	40 °C
environmental category	Up to 45°C at 95 % rel. humidity
Approvals Certificates	
General Product Approval	



Confirmation



other		Environment	
Confirmation	Miscellaneous	Environmental Con- firmations	Environmental Con- firmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2316>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE2316>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2316

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

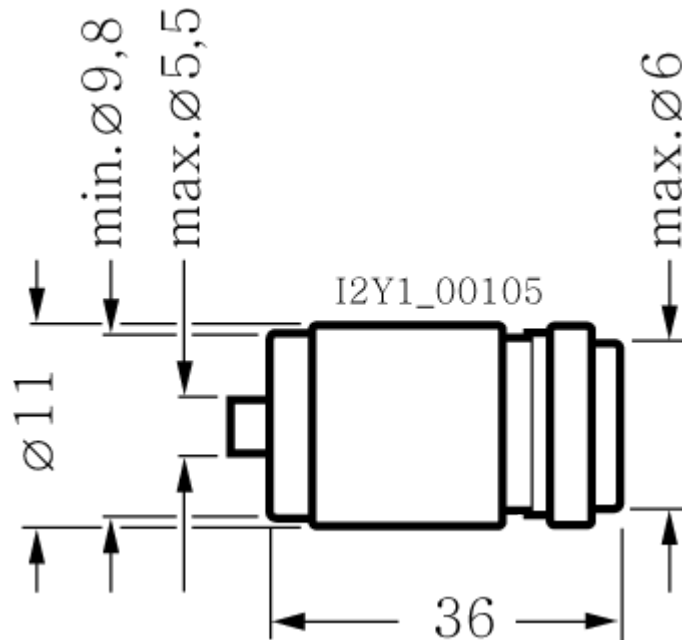

last modified:

1/27/2023

